



Barracuda Web Application Firewall

Powerful application-layer security for Web sites and Web servers

The Barracuda Web Application Firewall protects Web sites and Web applications from attackers leveraging protocol or application vulnerabilities to instigate data theft, denial of service, or defacement of an organization's Web site. Unlike traditional network firewalls or intrusion detection systems that simply pass HTTP, HTTPS, or FTP traffic for Web applications, the Barracuda Web Application Firewall proxies this traffic and inspects it for attacks to insulate Web servers from direct access by hackers.

Comprehensive Web Site Protection

The Barracuda Web Application Firewall provides award-winning protection from all common attacks on Web applications, including SQL injections, cross-site scripting attacks, session tampering and buffer overflows. As a full proxy, the Barracuda Web Application Firewall blocks or cloaks attacks, while preventing sensitive outbound data leakage such as credit card or Social Security numbers.


In addition, the Barracuda Web Application Firewall mitigates broken access control to applications by preventing cookie tampering and corruption of an application's access control system. Unlike intrusion detection systems that only analyze byte patterns, the Barracuda Web Application Firewall terminates HTTP traffic on behalf of the Web server to decode character sets, remove padded spacing, and normalize against common obfuscation techniques. For added security, the Barracuda Web Application Firewall provides full PKI integration for use with client certificates to verify identities of clients accessing the Web applications.

Advanced Traffic Management and Acceleration

To minimize ongoing administration associated with protecting Web sites against application vulnerabilities, the Barracuda Web Application Firewall automatically receives Energize Updates with the latest policy, security and attack definitions. In addition to the comprehensive security benefits, there are also application delivery capabilities such as SSL offloading, SSL acceleration and load balancing. These capabilities are designed to improve the performance, scalability, and manageability of today's most demanding data center infrastructures.



The Barracuda Web Application Firewall monitors and tracks common application attacks, performance statistics and bandwidth usage.

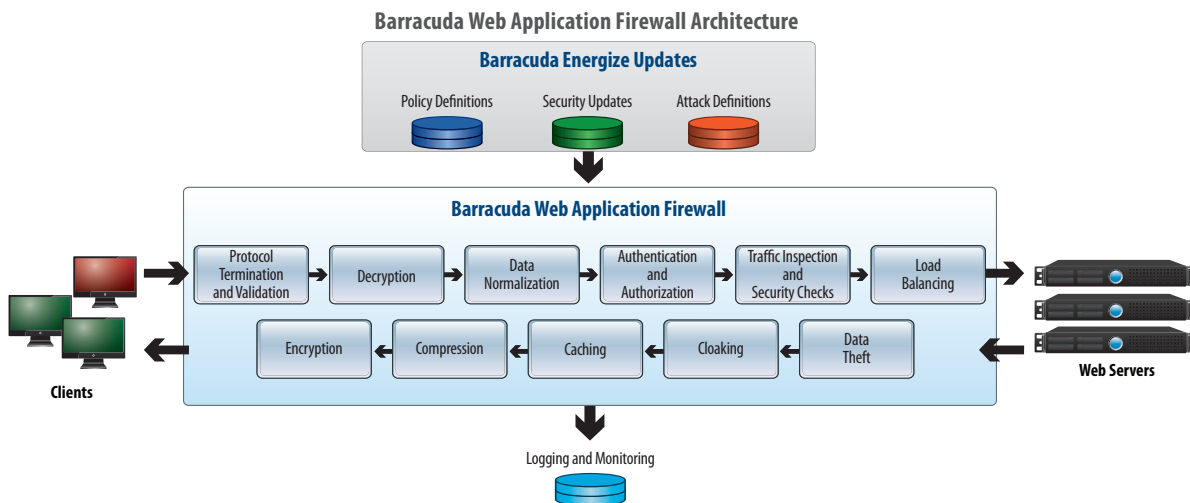

BARRACUDA WEB APPLICATION FIREWALL

MODEL
360
460
660
860
960



BARRACUDA WEB APPLICATION FIREWALL

MODEL
360
460
660
860
960



Internet



Network Firewall

Typical Deployment



Barracuda Web Application Firewall



Web Server

TECHNICAL SPECIFICATIONS

Key Features

SUPPORTED WEB PROTOCOLS

- HTTP/S 0.9/1.0/1.1
- FTP/S
- XML
- IPv6 Ready

WEB APPLICATION SECURITY

- OWASP Top-Ten Protection
- Protection against common attacks
 - SQL Injection
 - OS command injection
 - Cross-site Scripting
 - Cookie or Forms Tampering
- Form field meta data validation
- Adaptive security
- Web site cloaking
- Response control
 - Block client
 - Reset connection
 - Redirect
 - Custom response

- Outbound data theft protection
 - Credit card numbers
 - Social Security numbers
 - Custom pattern matching (regex)
- Granular policies to HTML elements
- Protocol limit checks
- File upload control
- Brute force protection
- Session tracking

AUTHENTICATION AND AUTHORIZATION

- LDAP/RADIUS/local user database
- Client certificates
- Single Sign-On
- RSA SecurID²
- CA SiteMinder²

LOGGING, MONITORING AND REPORTING

- System log
- Web Firewall log
- Access log
- Audit log

SIEM Integrations

- ArcSight
- RSA ENVISION
- Splunk
- Symantec

APPLICATION DELIVERY AND ACCELERATION

- High availability
- SSL offloading
- Load balancing
- Content routing

XML FIREWALL

- XML DOS protection
- Schema / WSDL enforcement
- WS-I conformance checks

System Features

- Graphical user interface
- Role-based administration
- Secure remote administration
- Optional Ethernet bypass
- Trusted host exemption
- Vulnerability scanner integration

Hardware Features

CONNECTORS

- WAN/LAN/MGMT ports
- Serial Port (DB-9) for console

HARDWARE SECURITY MODULE

- FIPS 140-2 HSM Model Available

POWER REQUIREMENTS

- AC Input Voltage - 110-240 V AC
- Frequency - 50 / 60 Hz

Virtual Appliance Models

- VMware ESX/ESXi
- VMware Server/Fusion/Workstation/Player
- Citrix XenServer
- Microsoft Hyper-V
- Oracle VirtualBox

Support Options

- Energize Updates Subscription
- Instant Replacement Service

MODEL COMPARISON	MODEL 360	MODEL 460	MODEL 660	MODEL 860	MODEL 960
CAPACITY*					
Backend Servers Supported	1-5	5-10	10-25	25-150	150-300
Throughput	25 Mbps	50 Mbps	100 Mbps	600 Mbps	1 Gbps
HARDWARE					
Rackmount Chassis	1U Mini	1U Mini	1U Fullsize	2U Fullsize	2U Fullsize
Dimensions (in)	16.8 x 1.7 x 14	16.8 x 1.7 x 14	16.8 x 1.7 x 22.6	17.4 x 3.5 x 25.5	17.4 x 3.5 x 25.5
Dimensions (cm)	42.7 x 4.3 x 35.6	42.7 x 4.3 x 35.6	42.7 x 4.3 x 57.4	44.2 x 8.9 x 64.8	44.2 x 8.9 x 64.8
Weight (lbs/kg)	12 / 5.4	12 / 5.4	26 / 11.8	46 / 20.9	52 / 23.6
Data Path Ports					
Copper NIC (Standard)	2 x 10/100	2 x Gigabit	2 x Gigabit	2 x Gigabit	2 x Gigabit
Fiber NIC (Optional) ¹				2 x Gigabit	2 x Gigabit
Management Port	1 x 10/100	1 x 10/100	1 x Gigabit	1 x Gigabit	1 x Gigabit
AC Input Current (Amps)	1.2	1.4	1.8	4.1	5.4
ECC Memory			✓	✓	✓
FEATURES					
HTTP/HTTPS/FTP Protocol Validation	✓	✓	✓	✓	✓
Protection Against Common Attacks	✓	✓	✓	✓	✓
Form Field Metadata Validation	✓	✓	✓	✓	✓
Web Site Cloaking	✓	✓	✓	✓	✓
Response Control	✓	✓	✓	✓	✓
Outbound Data Theft Protection	✓	✓	✓	✓	✓
Granular Policies to HTML Elements	✓	✓	✓	✓	✓
File Upload Control	✓	✓	✓	✓	✓
Logging, Monitoring and Reporting	✓	✓	✓	✓	✓
High Availability	✓	✓	✓	✓	✓
SSL Offloading	✓	✓	✓	✓	✓
Authentication and Authorization	✓	✓	✓	✓	✓
Vulnerability Scanner Integration	✓	✓	✓	✓	✓
Centralized Management	✓	✓	✓	✓	✓
Caching and Compression		✓	✓	✓	✓
LDAP/RADIUS Integration		✓	✓	✓	✓
Load Balancing		✓	✓	✓	✓
Content Routing		✓	✓	✓	✓
Adaptive Profiling			✓	✓	✓
AV for File Uploads			✓	✓	✓
XML Firewall			✓	✓	✓

US 15.2

Specifications subject to change without notice.

* Capacity depends on environment and selected options.

¹ Fiber NIC option replaces the standard 2x Copper Gigabit ports with 2x Fiber Gigabit Ports.

² Available on models 660 and above